

TACTICAL INERTIAL MEASUREMENT UNIT

FEATURES

- Miniature in size
- High Dynamic Range
- Low Bias Instability
- Low Angle Random Walk
- Continuous Self-Diagnosis
- High mechanical Shock Survivability
- RS422 Interface



APPLICATIONS

- Guidance, Navigation and Control
- Drone Navigation and Control
- Unmanned Ground Vehicle
- Flight Control Systems
- Robotics
- Guided Projectiles

DESCRIPTION

The CASTOR series model, CSTR-IMU1100 is a high-end tactical class inertial measurement unit consisting of high-performance tri-axial Accelerometer and tri-axial Gyroscope and tri-axial Inclinator sensors based on latest MEMS technology. The IMU is equipped with a high-speed processor that runs the digital signal processing algorithms, delivering control grade inertial measurement data. The IMU output is available over a RS422 interface. Its rugged and modular design makes it suitable for integration with control computers and other application hardware.

The sensing elements of each axis are factory-calibrated for bias, misalignment and are compensated for temperature effects to be usable across the entire operating temperature range. The miniature MEMS IMU, CSTR-IMU1100 offers 1.1 deg/hr bias instability performance and is suitable for inertial guidance and control applications where size is the constraint.


TECHNICAL SPECIFICATIONS

Parameter Name	Parameter Value		
	CASTOR		
	IMU1100		
Acceleration			
Range (g)	±10		
Bias Instability (µg) (@25°C)	Min.: 16	Typical: 20	Max.: 24
Bias Repeatability (mg)	± 1.5		
Bandwidth (Hz)	262		
VRW (m/s/rt(hr)) (262 Hz LPF, @25°C & 1000 Hz Data Rate)	Min.:0.021	Typical: 0.027	Max.:0.031
Gyro			
Range (°/s)	±480		
Bias Instability (°/hr) (@25°C)	Min.: 0.6	Typical: 1.1	Max.: 1.8
Bias Repeatability (°/hr)	± 100		
ARW (°/sqrt(hr)) (262 Hz LPF, @25°C & 1000 Hz Data Rate)	Min. : 0.23	Typical: 0.45	Max.: 1.07
Bandwidth (Hz)	262		
Inclinometer			
Range (g)	±1.7		
Bias Instability (µg) (@25°C)	Min.: 21	Typical: 28	Max.: 35
Bias Repeatability (mg)	± 0.4		
VRW (m/s/rt(hr)) (262 Hz LPF, @25°C & 1000 Hz Data Rate)	Min.:0.028	Typical: 0.03	Max.:0.032
Electrical			
Input Voltage (VDC)	4.5 to 6		
Power Consumption (W)	<1.3		
Diagnostics			
Update Rate (Hz)	Onboard Temperature, Voltages, Sensor Health		
AUX (full scale) (V)	Up to 2000		
Interface	±2.5		
RS422, External Trigger Input, Time of Validity (TOV), Auxiliary Input			
Physical			
Dimensions (mm)	38.6 (L) x 44.8 (W) x 21.5 (H)		
Weight (gm)	72 ± 3		
Environmental			
Operating Temperature (°C)	-40 to +71		
Storage Temperature (°C)	-55 to +90		
Survival Shock (g)	1500/ 0.5 ms half-sine		



MECHANICAL DIMENSIONS

All the dimensions in mm


TOP VIEW



ISOMETRIC VIEW FOR REFERENCE

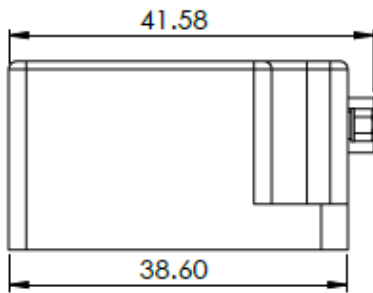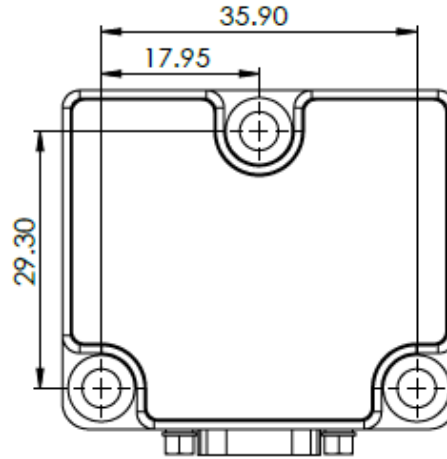

LHS VIEW

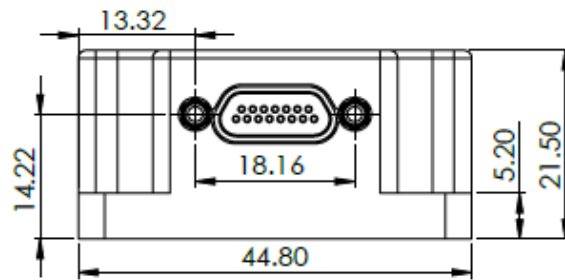

FRONT VIEW

ORDERING INFORMATION

CSTR - IMU1100 (Product Code: 26008)